

Product data sheet


Perform

AR7383



ARRONE overhead concealed door closing device:

- Power size: 2 to 4 adjustable by spring tension
- Function: Closing, latching, cushion stop
- Cover: no cover
- Maximum door width: 1,100 mm
- Maximum door weight: 80 kg
- Arm application: door mount concealed, transom mount concealed
- Successfully type tested for conformity to all the requirements of **BS EN 1154:1997**
- Door mount pull side, transom mount pull side: 3 | 8 | 4/2 | 1* | 1 | 3
- Included in a successful fire test to **BS EN 1634** Part 1. Assessed for use on 30, 60, 90 and 120 minute timber fire doors.
- CE Marked: AD5071
- Certifire approved: CF5181; DOP: HUK0026
- The AR7383 series door closing device has been successfully fire tested with the use of an intumescent kit (AR/INT-7383). The supply and fitting of this intumescent kit is essential to the products compliance with the fire test evidence it has gained. HOPPE take no responsibility for any product purchased and fitted to fire resistant door sets without intumescent protection as tested with the product.

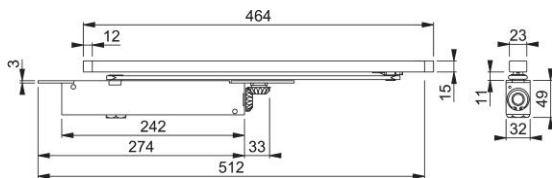

Article number	50002478
Product ref.	AR7383-KIT-SE
EAN-Code	5051358078147
Country of origin	Taiwan
CN-Code	83026000
Type	mechanism and slide track
Door type	wooden door/metal door
Maximum door width	1100 mm
Maximum door weight	80 kg
Arm Application	figure 1 and 61
Mechanism function	Spring adjustable, closing/latching speed
Mechanism type	cam action
Fixings	Timber door and metal door
Shape	
Power size	2 to 4
Opening Angle	max. 105° opening
Mechanism dimensions and fixing centres	276x32x45 mm; centres 320x20 mm; Track 424
Arm type	Concealed slide arm
Fire safety accessories	Intumescent kit, Mono Ammonium Phosphate based
Finish	Silver Enamel
Arm finish	Silver Enamel
Range	ARRONE Range
Packing unit	1
Outer carton	9