

Product data sheet


Perform

AR8200



ARRONE overhead door closing device:

- Power size: EN 2 to EN 4, adjustable by template
- Function: closing, latching
- Cover: slide
- Arm application: Fig 1, Fig 6 and Fig 61 fixing positions
- Successfully type tested for conformity to all requirements of **BS EN 1154:1997**
 Tested: door width 950-1,100 mm, door weight 60-80 kg
 Classification (Fig 1/Fig 61): 3 | 8 | 4/2 | 1* | 1 | 3
 Classification (Fig 6): 3 | 8 | 3 | 1* | 1 | 3
- Fire tested to **BS EN 1634-1**: suitable for 30, 60 and 120 minute timber fire doors
- Certification:
 CE: AD0118, DOP HUK0020
 Certifire: CF295

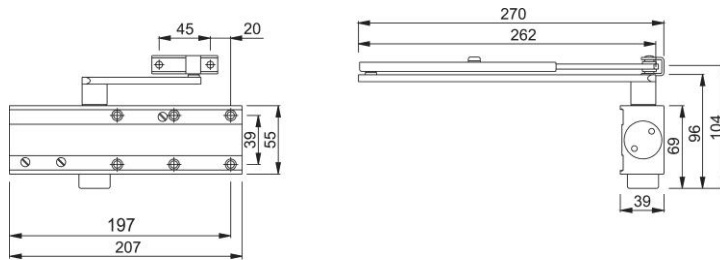

| | |
|---|---|
| Article number | 50020663 |
| Product ref. | AR8200-BLK |
| EAN-Code | 5051358018020 |
| Country of origin | Taiwan |
| CN-Code | 83026000 |
| Door type | wooden door |
| Tested door width | 1100 mm |
| Tested door weight | 80 kg |
| Arm Application | figure 1, 6 and 61 |
| Mechanism function | Template adjustment, closing/latching speed |
| Mechanism type | Rack & pinion |
| Fixings | Timber door |
| Shape | Trim Plate |
| Power size | 2 to 4 |
| Opening Angle | max. 105° opening |
| Mechanism dimensions and fixing centres | 207x55x38.5 mm; centres 97x197x39 mm |
| Arm type | Scissor arm, fixed joint, flat form, adjustable |
| Finish | RAL 9005 jet black |
| Finish of the cover | RAL 9005 jet black |
| Arm finish | RAL 9005 jet black |
| Range | ARRONE Range |
| Packing unit | 1 |
| Outer carton | 6 |