

Product data sheet


Perform

AR6900



ARRONE overhead door closing device:

- Power size: EN 2 to EN 4, adjustable by template
- Function: closing, latching
- Cover: mini designer
- Arm application: Fig 1, Fig 6 and Fig 61 fixing positions
- Successfully type tested for conformity to all requirements of **BS EN 1154:1997**
Tested: door width 950-1,100 mm, door weight 60-80 kg
Classification (Fig 1/Fig 61): 3 | 8 | 4/2 | 1* | 1 | 3
Classification (Fig 6): 3 | 8 | 3 | 1* | 1 | 3
- Fire tested to **BS EN 1634-1**: suitable for 30, 60 and 120 minute timber fire doors
- Certification:
CE: AD0095, DOP HUK0025
Certifire: CF603

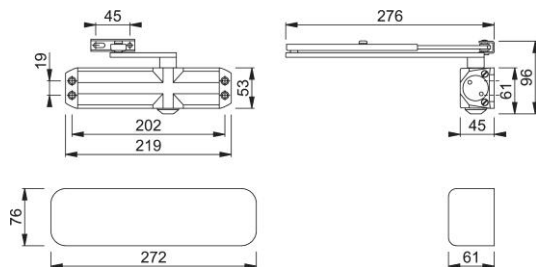

Article number	87106820
Product ref.	AR6900-D-SSS/SSS
EAN-Code	5051358027831
Country of origin	Taiwan
CN-Code	83026000
Door type	wooden door
Tested door width	1100 mm
Tested door weight	80 kg
Arm Application	figure 1, 6 and 61
Mechanism function	Template adjustment, closing/latching speed
Mechanism type	Rack & pinion
Fixings	Timber door
Shape	Mini-Designer
Power size	2 to 4
Opening Angle	max. 105° opening
Mechanism dimensions and fixing centres	219x53.4x45 mm; centres 202x19 mm
Arm type	Scissor arm, fixed joint, flat form, adjustable
Finish	SSS-E Satin Stainless Steel effect
Finish of the cover	SSS-E Satin Stainless Steel effect
Arm finish	SSS-E Satin Stainless Steel effect
Range	ARRONE Range
Packing unit	1
Outer carton	6